

Drum melting unit is a reliable, highly efficient, compact and environmentally friendly solution for your bitumen handling systems.

#### **MAIN FEATURES**

- ◆ 20-30 drums can be loaded according to the model.
- Also used for melting other highly viscous fluids in all standard drums.
- ◆ Thermal oil heated helical gear bitumen pump and filter integrated to the system.
- Hydraulic lifting system ensures easy and fast loading of drums.
- High capacity heating coils design ensures fast melting.
- ◆ Thanks to insulation with thick rockwool and sheet aluminum, heat loss is minimized.



DRUM MELTING UNIT

### **MAIN FEATURES**

- Optional: uninterrupted operation with level indicator system.
- ♦ **Drum melting unit** also has an integrated configuration with thermal oil heater, thermal oil heater, which both positioned on a single chassis and can be transferred with 40′ Open Top container.







#### **TYPES AND FEATURES**

### ♦ 30 drums

 $3 \times 10 = 30$  drum capacity. 6-9t/h capacity according to ambient conditions. Transport via  $1 \times 40'$  Flat Rack container or 1 standard trailer.

### ♦ 20 drums

 $2 \times 10 = 20$  drum capacity.


4-5t/h capacity according to ambient conditions.

Transport via 1 x 40' Open Top container or 1 standard trailer.





# **PRODUCT OVERVIEW – FLOW CHART**

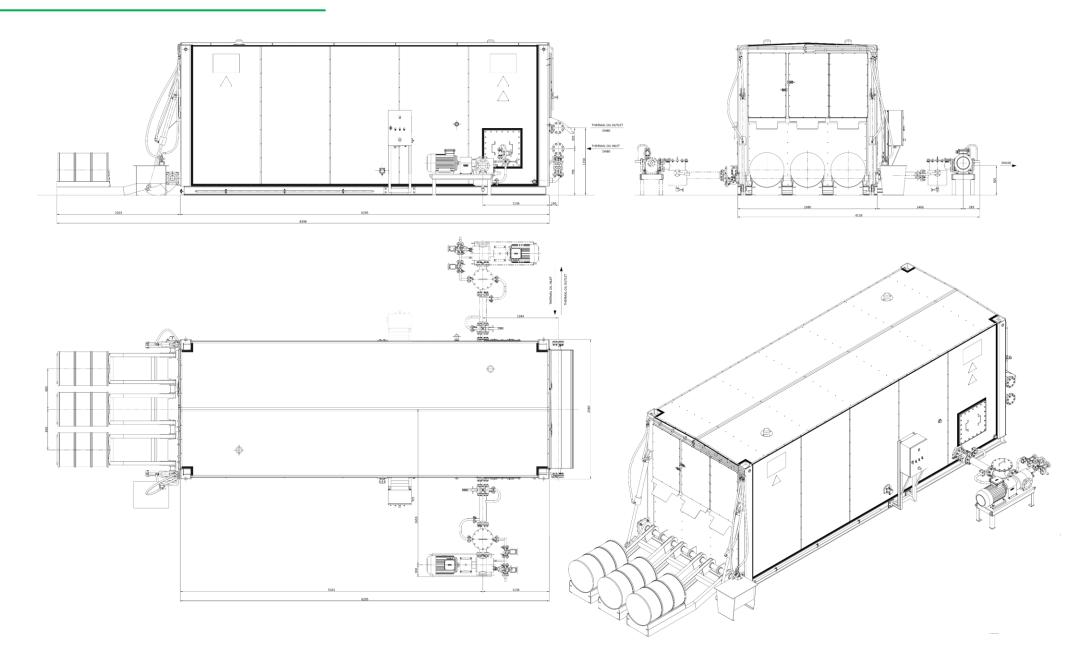

## **CONTACT US**



italmachinery.com.ua



sales@italmachinery.com.ua



+38 (067) 271 61 61

+38 (067) 371 61 61

+38 (067) 801 77 00

+38 (096) 449 32 08



facebook.com/italmachinery



@italmachinery



**Ital Machinery** 

